F.B.Ins.

POWER BUSHING ASSEMBLIES
8.7kV CLASS, 95kV BIL, 10.25" CREEP

These bushings are designed for transformer and special power apparatus applications. **The electrical ratings given are based on use in a liquid filled transformer with the lower end of the bushing under oil.** Porcelain is gray glazed all over and the top skirts are designed for outdoor application.

Clamps and washers are non-magnetic. Constant gasket pressure to top terminal is maintained by disc springs to compensate for the thermal expansion and contraction of the copper stud. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets, add the suffix "C" to the part number.

Bushings are designed for mounting in ϕ3.13 (min.) hole.

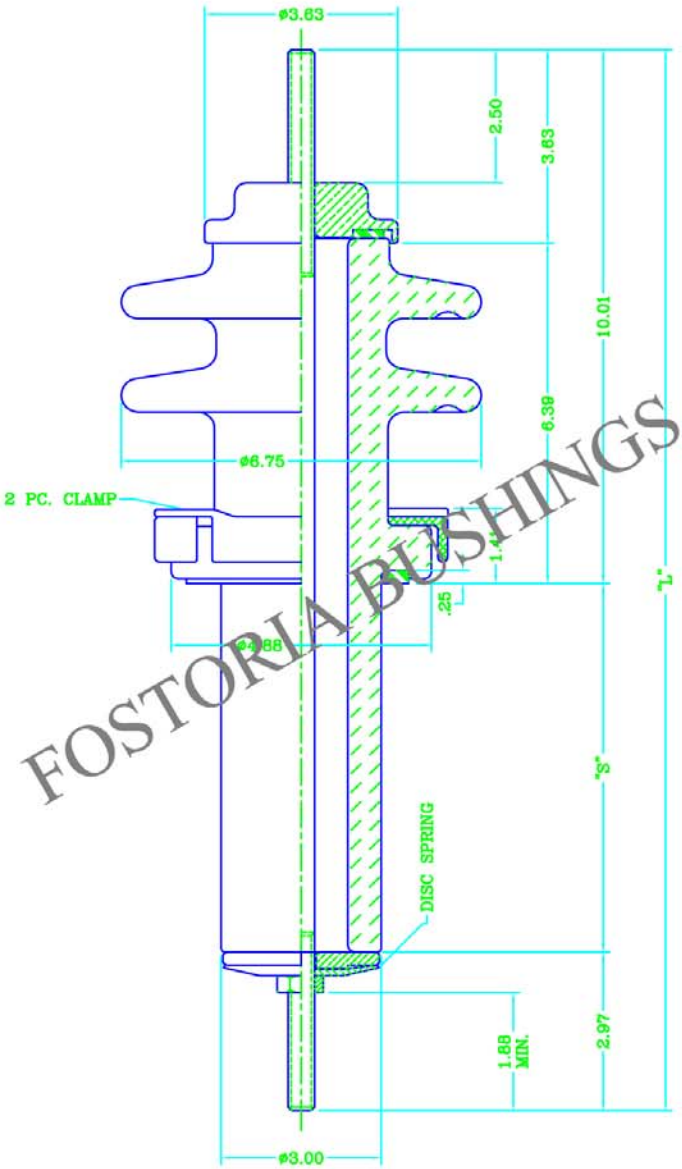

STUD SIZE	PART NO.	"L"	"S"
.500-13 UNC-2A 208A	352600	19.89	6.91
	352602	26.89	13.91
	352603	33.89	20.91
	352604	36.89	23.91
.625-18 UNF-2A 417A	352605	19.89	6.91
	352607	26.89	13.91
	352608	33.89	20.91
	352609	36.89	23.91
.750-16 UNF-2A 600A	352610	19.89	6.91
	352612	26.89	13.91
	352613	33.89	20.91
	352614	36.89	23.91
1.000-14 UNS-2A 800A	352615	19.89	6.91
	352617	26.89	13.91
	352618	33.89	20.91
	352619	36.89	23.91
1.125-12 UNF-2A 1000A	352620	19.89	6.91
	352622	26.89	13.91
	352623	33.89	20.91
	352624	36.89	23.91
1.250-12 UNF-2A 1200A	352625	19.89	6.91
	352627	26.89	13.91
	352628	33.89	20.91
	352629	36.89	23.91
1.500-12 UNF-2A 1700 A	352630	19.89	6.91
	352632	26.89	13.91
	352633	33.89	20.91
	352634	36.89	23.91
1.625-12 UN-2A 2000A	352635	19.89	6.91
	352637	26.89	13.91
	352638	33.89	20.91
	352639	36.89	23.91

FOSTORIA BUSHINGS & INSULATORS CORP.

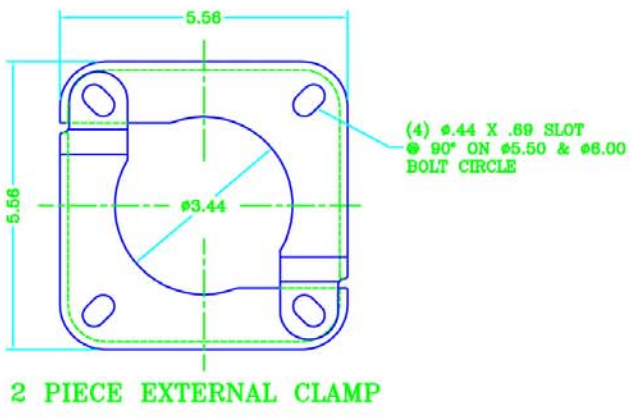

2 PIECE EXTERNAL CLAMP