


POWER BUSHING ASSEMBLIES

15kV CLASS, 110kV BIL, 15.00" CREEP

These bushings are designed for transformer and special power apparatus applications. **The electrical ratings given are based on use in a liquid filled transformer with the lower end of the bushing under oil.** Porcelain is gray glazed all over and the top skirts are designed for outdoor application.

Clamps and washers are non-magnetic. Constant gasket pressure to top terminal is maintained by disc springs to compensate for the thermal expansion and contraction of the copper stud. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets, add the suffix "C" to the part number.

Bushings are designed for mounting in $\phi 3.13$ (min.) hole.

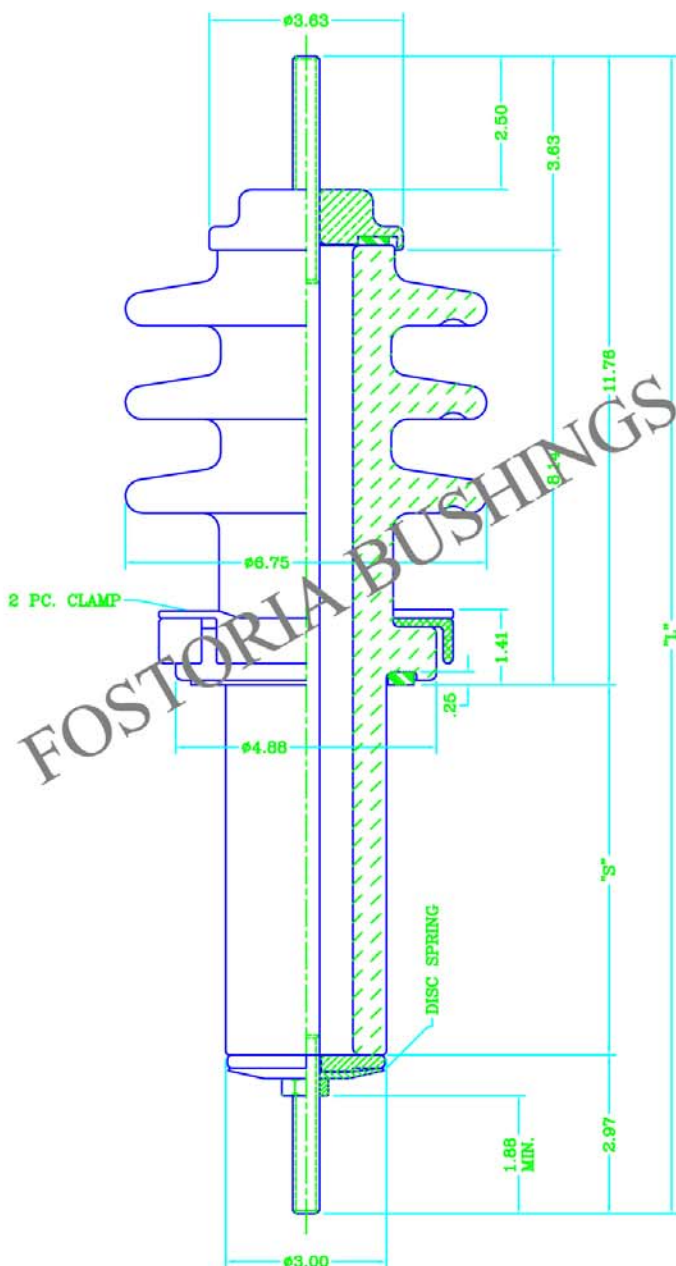

| STUD SIZE | PART NO. | "L" | "S" |
|---------------------------|----------|-------|-------|
| .500-13 UNC-2A 208A | 353600 | 21.64 | 6.91 |
| | 353602 | 28.64 | 13.91 |
| | 353603 | 35.64 | 20.91 |
| | 353604 | 38.64 | 23.91 |
| .625-18 UNF-2A 417A | 353605 | 21.64 | 6.91 |
| | 353607 | 28.64 | 13.91 |
| | 353608 | 35.64 | 20.91 |
| | 353609 | 38.64 | 23.91 |
| .750-16 UNF-2A 600A | 353610 | 21.64 | 6.91 |
| | 353612 | 28.64 | 13.91 |
| | 353613 | 35.64 | 20.91 |
| | 353614 | 38.64 | 23.91 |
| 1.000-14 UNS-2A 800A | 353615 | 21.64 | 6.91 |
| | 353617 | 28.64 | 13.91 |
| | 353618 | 35.64 | 20.91 |
| | 353619 | 38.64 | 23.91 |
| 1.125-12 UNF-2A 1000A | 353620 | 21.64 | 6.91 |
| | 353622 | 28.64 | 13.91 |
| | 353623 | 35.64 | 20.91 |
| | 353624 | 38.64 | 23.91 |
| 1.250-12 UNF-2A 1200A | 353625 | 21.64 | 6.91 |
| | 353627 | 28.64 | 13.91 |
| | 353628 | 35.64 | 20.91 |
| | 353629 | 38.64 | 23.91 |
| 1.500-12 UNF-2A 1700 A | 353630 | 21.64 | 6.91 |
| | 353632 | 28.64 | 13.91 |
| | 353633 | 35.64 | 20.91 |
| | 353634 | 38.64 | 23.91 |
| 1.625-12 UN-2A 2000A | 353635 | 21.64 | 6.91 |
| | 353637 | 28.64 | 13.91 |
| | 353638 | 35.64 | 20.91 |
| | 353639 | 38.64 | 23.91 |

