

INDOOR FEED-THROUGH BUSHING ASSEMBLIES


15 kV CLASS, 110 kV B.I.L., 15.5" MIN. CREEP

HORIZONTAL OR VERTICAL MOUNTING

The copper stud and the top cap are joined by soldering or brazing. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets, add the suffix "-C" to the part number.

Bushing assembly is supplied without plating on cap and stud. For ordering assemblies with tin-plated cap-stud assemblies add the suffix "-Sn" to the part number. For ordering assemblies with silver-plated cap-stud assemblies add the suffix "-Ag" to the part number.

Example part numbers: 373100-CSn (with cork-rubber gaskets and tin-plated cap-stud assembly)
 373005-C (with cork-rubber gaskets and no plating)
 373108-Ag (with standard gaskets and silver-plating cap-stud assembly)

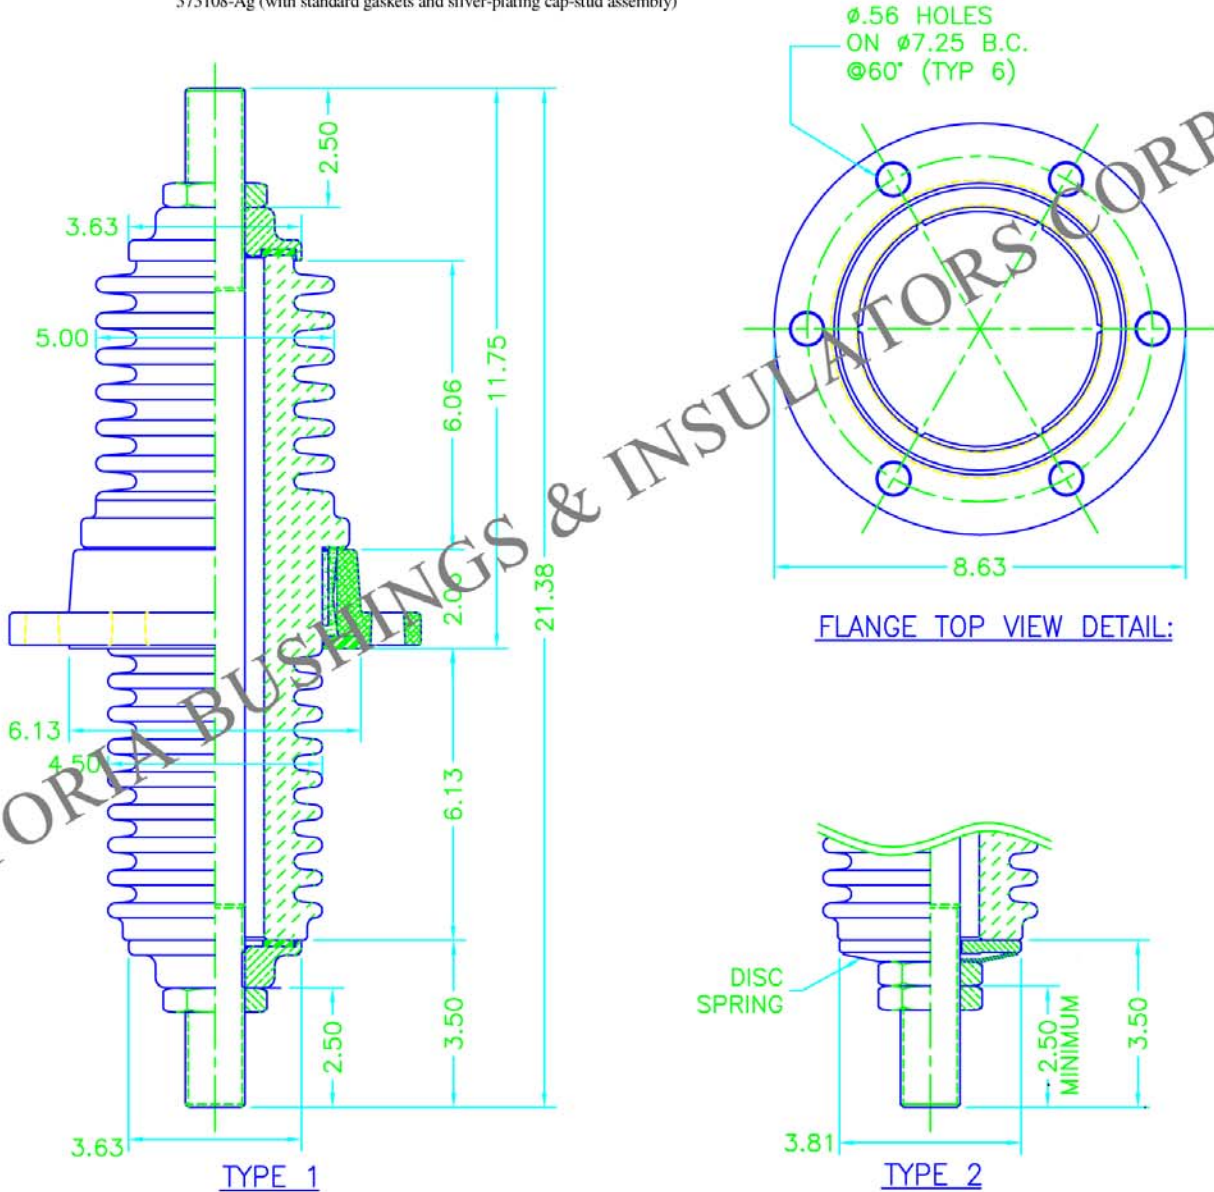

PART NO.		STUD SIZE	RATING
TYPE 1	TYPE 2		
373100	373000	0.500-13 UNC-2A	208 A
373101	373001	0.625-18 UNF-2A	300 A
373102	373002	0.750-16 UNF-2A	450 A
373103	373003	1.000-14 UNS-2A	800 A
373104	373004	1.125-12 UNF-2A	1000 A
373105	373005	1.250-12 UNF-2A	1200 A
373106	373006	1.500-12 UNF-2A	1600 A
373107	373007	1.625-12 UN-2A	1875 A
373108	373008	1.750-12 UN-2A	2100 A
373109	373009	2.000-12 UN-2A	2600 A